

GD PES-Series DuoGrade™ Serial Layer Polyethersulfone


GD PES-Series DuoGrade™ Serial Layer Polyethersulfone Filter Cartridges deliver extended life and excellent retention. Featuring a Microglass prefiltration layer, this serial construction makes the GD PES an ideal choice for clarification of particulate-heavy solutions in a variety of food/ beverage, pharmaceutical, biological, and chemical applications. With excellent flowrates, low pressure drops, and superior throughput volumes, GD PES cartridges can be used as final filters or to protect downstream sterilizing grade cartridges. Each cartridge is flushed with 18 megaohm High Purity deionized water and is integrity tested to ensure the delivery of clean effluent with low extractables. Designed to tolerate repeated hot water sanitization and *in-situ* steam sterilization cycles for maximum service life.

Microbial Retention Performance

Rating	Challenge Microbe	Log Reduction Value (LVR)
.2µ	<i>Brevundimonas diminuta</i>	7.6
.45µ	<i>Serratia marcescens</i>	6.6
.65µ	<i>Saccharomyces cerevisiae</i>	4.8

*Independently tested in accordance with STM F838

Flow Rate vs Pressure Drop

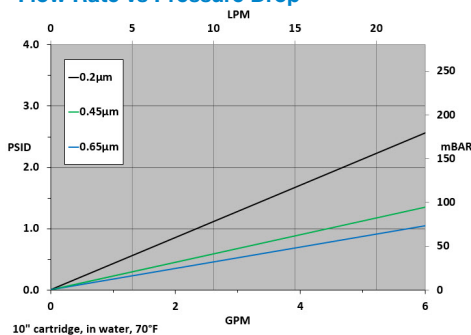

Ordering Information

GD PES	Rating(µ)	A	Length	C	End Cap Style	O-Rings/Gaskets	-	Adders
	0.2		10" (25.4cm)		2 = DOE Flat Gasket ^{1 2}	B = Buna-N		CS = 316SS Compression Spring
	0.45		20" (50.8 cm)		3 = 222 w/Fin	E = EPDM		I = Stainless Steel Insert
	0.65		30" (76.2 cm)		4 = 222 w/Flat Cap	S = Silicone		
			40" (101.6 cm)		6 = 226 w/Flat Cap	T = Teflon® Encapsulated Viton® ¹		
					7 = 226 w/Fin	V = Viton®		
					16 = 213 Internal O-Ring	Z = Teflon® Encapsulated Silicone ²		
					28 = 222 3-Tabs w/ Fin			

1 - When ordering with DOE Flat Gasket, gasket style "T" is not available
2 - When ordering with DOE Flat Gasket, gasket style "Z" is not available

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required. For additional technical support, a product Performance Guide is available upon request. SV_GDPES_082124



Typical Applications

- Wine, Beer, & Spirits
- Bottled Water, Juices, & Soft Drinks
- Cell Culture Media
- Large Volume Parentals
- Bulk Pharmaceutical Solutions

Construction Materials

Membrane Polyethersulfone
Support Media Polypropylene
End Caps Polypropylene
Center Core Polypropylene
Outer Support Cages Polypropylene
O-Rings/Gaskets Buna, EPDM, Silicone
 Teflon® Encapsulated Viton®¹, Viton®,
 Teflon® Encapsulated Silicone²

Dimension (Nominal)

Length 10 to 40 in (25.4 to 101.6 cm)
Outside Diameter 2.7 in (7.06 cm)

Operating Conditions

Change Out ΔP (recommended) 35 PSID (2.4 bar)
Temperature (max) 176°F (80°C)
Differential Pressure (max)72 PSID at 68°F
 (5.0 bar at 20°C)

Sanitization/Sterilization

Filtered Hot Water 176°F (80°C) for 30 min
Steam Sterilization 250°F (121°C) for 30 min
 multiple cycles

Chemicals: Cartridges are compatible with most chemical sanitizing agents.

Note: Stainless steel insert option required for all cartridges being hot water sanitized or steam sterilized.

Toxicity

All polypropylene components meet the specifications for biological safety per USP Class VI – 121°C for plastics.

Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 1935/2004, and/or 10/2011.