



GGHNY-Series General Grade Nylon and Plus+ Nylon

GGHNY-Series High Purity General Grade Nylon and Plus+ Nylon Filter Cartridges, featuring Nylon 6,6 membrane, provide excellent particulate retention and cleanliness for general use applications. Nylon 6,6 membrane has performed successfully over many decades, establishing a legacy of proven performance value. The optional positive zeta potential surface charge (Plus+) enhances retention performance for particulate well smaller than the stated micron rating, for applications that may include removal of haze, color bodies, and endotoxins. Manufactured in a cleanroom environment to maintain high standards of purity and cleanliness.

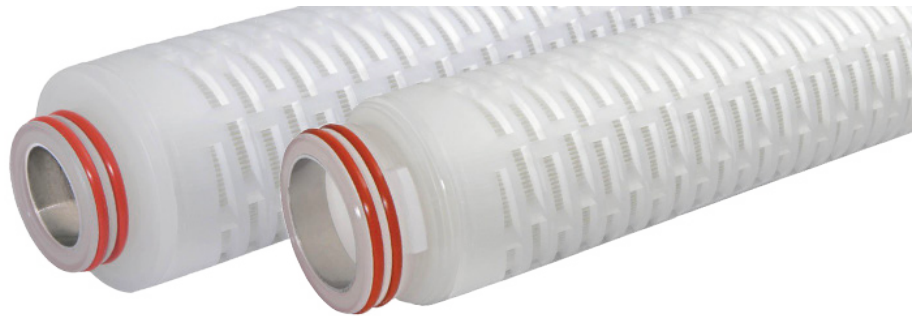

Flow Rate vs Pressure Drop

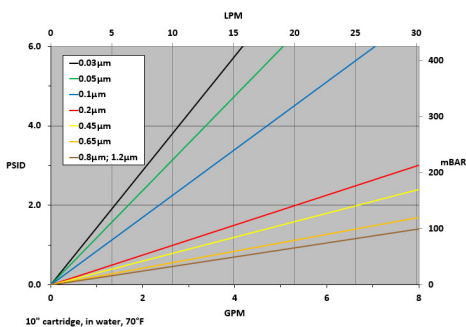

Typical Applications

- Drinking Water
- Wine
- Soft Drinks
- Pharmaceutical
- Fermentation
- Endotoxin Removal

Ordering Information

GGHNY	Rating(μ)	A	Length	C	End Cap Style	O-Rings/Gaskets	-	Adders
GGHNY+	0.03		10" (25.4cm)		2 = DOE Flat Gasket ^{1 2}	B = Buna-N		CS = 316SS Compression Spring
	0.05		20" (50.8 cm)		3 = 222 w/Fin	E = EPDM		I = Stainless Steel Insert
	0.1		30" (76.2 cm)		4 = 222 w/Flat Cap	S = Silicone		
	0.2		40" (101.6 cm)		6 = 226 w/Flat Cap	T = Teflon® Encapsulated Viton® ¹		
	0.45				7 = 226 w/Fin	V = Viton®		
	0.65				16 = 213 Internal O-Ring	Z = Teflon® Encapsulated Silicone ²		
	0.8				28 = 222 3-Tabs w/ Fin			
	1.20							

1 - When ordering with DOE Flat Gasket, gasket style "T" is not available
2 - When ordering with DOE Flat Gasket, gasket style "Z" is not available

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required. For additional technical support, a product Performance Guide is available upon request.

SV_GGHNY_06202124

Construction Materials

Membrane Nylon 6,6
Support Media Polypropylene
End Caps Polypropylene
Center Core Polypropylene
Outer Support Cages Polypropylene
O-Rings/Gaskets Buna, EPDM, Silicone
 Teflon® Encapsulated Viton®¹, Viton®,
 Teflon® Encapsulated Silicone²

Dimension (Nominal)

Length 10 to 40 in (25.4 to 101.6 cm)
Outside Diameter 2.7 in (7.06 cm)

Operating Conditions

Change Out ΔP (recommended) 35 PSID (2.4 bar)
Temperature (max) 176°F (80°C)
Differential Pressure (max) 50 PSID at 68°F
 (3.4 bar at 20°C)

Sanitization/Sterilization

Filtered Hot Water 176°F (80°C) for 30 min
Steaming Sterilization 250°F (121°C) for 30 min
 multiple cycles

Chemicals: Cartridges are compatible with most chemical sanitizing agents.

Note: Stainless steel insert option required for all cartridges being hot water sanitized or steam sterilized.

Toxicity

All polypropylene components meet the specifications for biological safety per USP Class VI – 121°C for plastics.

Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 1935/2004, and/or 10/2011.