


## PPE-Series Economy Grade Pleated Polypropylene

PPE-Series High Purity Economy Grade Pleated Polypropylene Filter Cartridges provide an economical, 100% polypropylene element for removal of fine or coarse particulate from fluid streams.

The pleated depth media is encapsulated in an integral, continuous length, thermally-bonded structure for cleanliness, pressure tolerance, and chemical inertness. Offered in both absolute-rated (up to 99.98% retention) and nominally-rated (90% retention) grades in common adapter configurations. Manufactured in a clean-room environment to maintain high standards of purity and cleanliness.



### Flow Rate vs. Pressure Drop

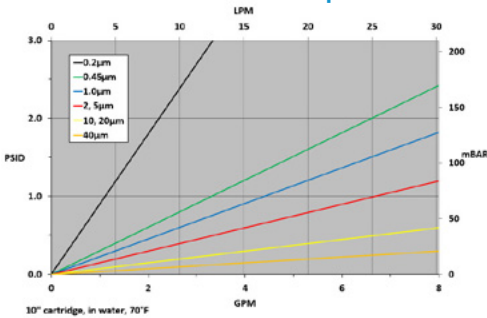

\*All data is based on absolute rated medias. Nominally rated medias will result in a pressure drop reduction of approximately 10%.

### Typical Applications

- Food & Beverage
- Photographic
- Deionized Water
- R.O. Pre-Filtration
- Process Water
- Fine Chemicals
- Process
- Plating Chemicals
- Wastewater
- Produced Water
- Cosmetics

### Ordering Information

PPE	Rating (µ)	Retention	Length	N	End Cap Style	O-Rings/Gaskets	-	Adders
	0.2	A = Absolute	10" (25.4 cm)		2 = DOE Flat Gasket	B = Buna		CS = 316SS Compression Spring
	0.45	N = Nominal	20" (50.8 cm)		3 = 222 w/ Fin	E = EPDM		I = Stainless Steel Insert
	1.0		30" (76.2 cm)		4 = 222 w/ Flat Cap	S = Silicone		SS = Stainless Steel Core
	2.0		40" (101.6 cm)		5 = 222 w/ Spring	T = Teflon® Encapsulated Viton®		
	5.0					V = Viton®		
	10.0							
	20.0							
	40.0							

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required. For additional technical support, a product Performance Guide is available upon request.

### Construction Materials

- Filtration Media** ..... Polypropylene
- Support Media** ..... Polypropylene
- End Caps** ..... Polypropylene
- Center Core** ..... Polypropylene
- Outer Support Netting** ..... Polypropylene
- O-Rings/Gaskets** ..... Buna, EPDM, Silicone, Teflon® Encapsulated Viton®, Viton®

### Toxicity

All polypropylene components meet the specifications for biological safety per USP Class VI – 121°C for plastics.

### Dimensions

- Length:** 10 to 40 inches (25.4 to 101.6 cm) nominal
- Outside Diameter:** 2.50 inches (6.35 cm) nominal

### Operating Conditions

- Change Out ΔP (recommended)** ..... 35 PSID
- Temperature (max)** ..... 176°F (80°C)
- Differential Pressure (max)** ..60 PSID (4.1 bar) at 68°F (20°C)

### Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.